

• silent running

Available on request:  
220-240 V/~60 Hz  
110-120

ALU AL #513218  
housing brushed aluminium,  
reversible wooden blades silver grey  
(see picture)/cherry




ALU AL #513218 housing brushed aluminium/reversible wooden blades silver grey/cherry (see picture)



ALU WE #513219 housing aluminium white coated, blades white finish



Interchangeable blades #19018 reversible wooden blades maple/chalked oak

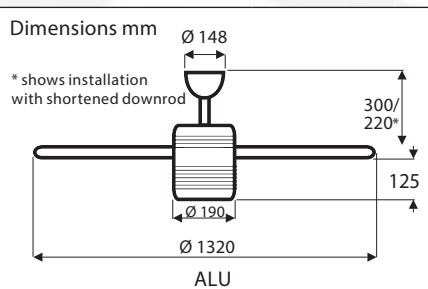

No. of blades	5
Power motor (W)	8 - 60
Power light kit max. (W)	75
Voltage (V/Hz)	220-240/~50
Size Ø (cm/")	132/52
No. of speeds (w. P/C)	3
Rotation max. (RPM)	185
Weight (kg)	7.7
Installation: 2 screws Ø min. 4.5 mm separation 70 - 110 mm	

### Retro pure!

- 3 speeds pull chain switch (hidden).
- Forward/reverse pull chain switch (hidden).
- Integrated light kit (E27), max. 75 W, suitable for ESL.
- Light pull chain switch (hidden).
- Balanced motor and blades.
- Installation on sloped ceilings (up to 38°, with remote control 22°).

### Options:

- Optional controls available
- Longer downrods available for high ceilings
- Replacement blades

Product	Code No.	Housing Finish	Reversible Blade Finish
ALU AL	513218	Brushed aluminium	Silver grey coated/Cherry
ALU WE	513219	White coated	White finish

The integrated luminaire is compatible with bulbs of the energy classes: E - A++.